




# gridforce

THE **ULTIMATE** IN GROUND REINFORCEMENT

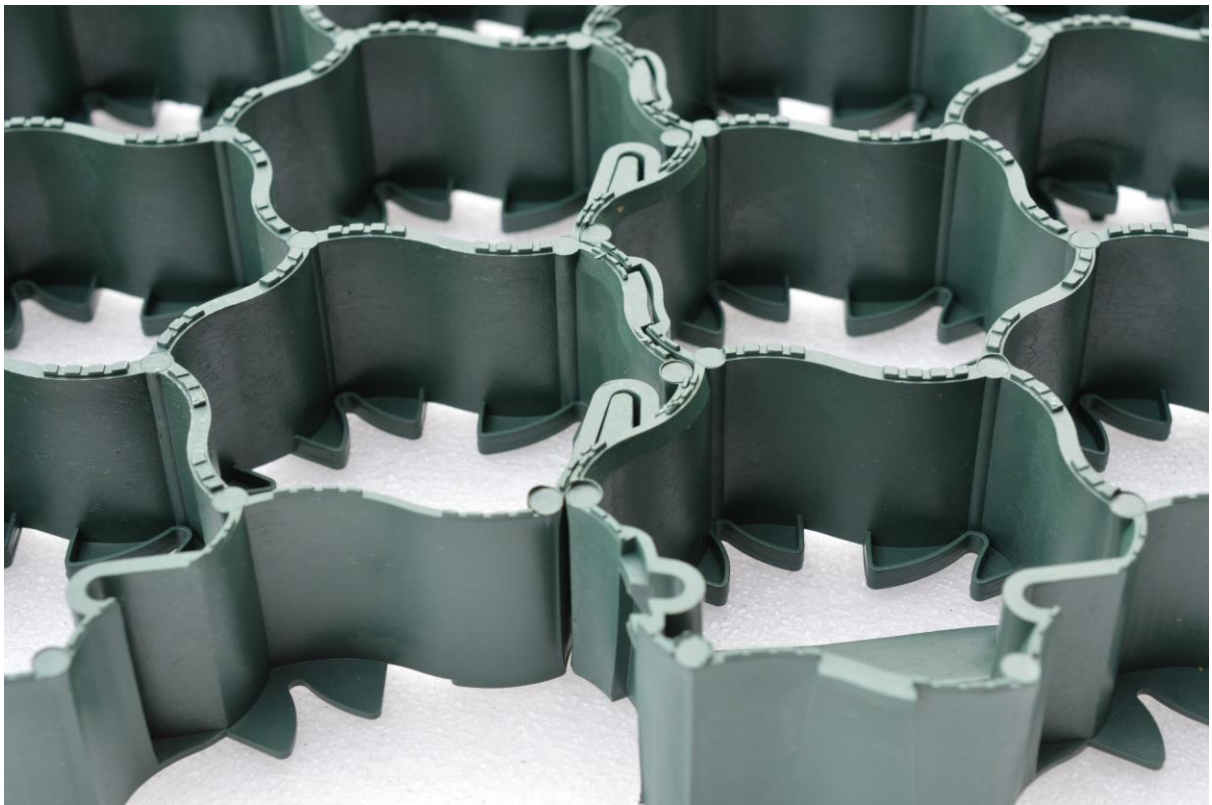

# PARK 40





**Recommended for:** Gravel and grass driveways, car parking, pathways, event parking, caravan parks, lawn and bank reinforcement, instant grass reinforcement

**Maximum load bearing capacity (empty pavers):** up to 200 tonnes/m<sup>2</sup>

**Axle loading:** 10 tonnes

**Size:** 390mm x 580mm x 40mm

**Detail:** 54 honeycombs of 70mm x 70mm per tile

**Wall thickness:** 2.5mm

**Weight:** 1kg per tile

**Packaging:** 4 tiles (2x2) = 0.9m<sup>2</sup>, 60 layers of 4 tiles = 54m<sup>2</sup>, 240 tiles per pallet.

Dimensions of a pallet = 780mm x 1160mm x 2550mm

**Material:** LDPE – Low Density Polyethylene, 100% recycled, withstands frost and UV radiation, natural stability: resists extreme temperatures -30 to 85°C

**Certifications:**

DIN 38412 – Neutral for the environment, lifespan higher than 10 years

DIN 4102 – Approval emergency access routes, fire resistance

DIN IN ISO 124 and B125 – Approval for car parks, access roads & storage areas

Compliance with Part M – Disabled access

