




gridforce

THE **ULTIMATE** IN GROUND REINFORCEMENT

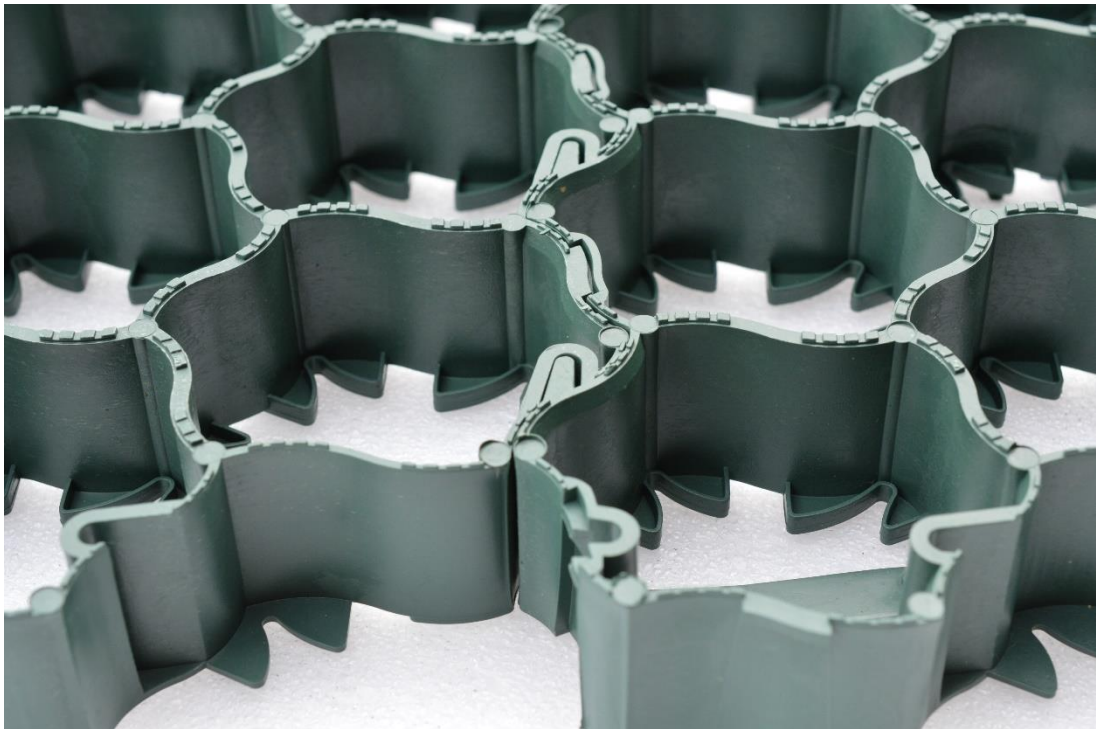

PARK 40



Recommended for: Gravel and Grass driveways, car parking, pathways, event parking, caravan parks, lawn and bank reinforcement, Instant grass reinforcement

Maximum load bearing capacity (empty pavers): up to 1000 tonnes/m² (Filled)

Axle loading: 10 tonnes

Size: 390mm x 580mm x 40mm

Detail: 54 honeycombs of 70mm x 70mm per tile

Wall thickness: 2.5mm

Weight: 0.75kg per tile

Packaging: 4 tiles (2x2) = 0.9m², 60 layers of 4 tiles = 54m², 240 tiles per pallet.

Dimensions of a pallet = 780mm x 1160mm x 2550mm

Material: LDPE – Low Density Polyethylene, 100% recycled, withstands frost and UV radiation, natural stability: resists extreme temperatures -30 to 85°C



Certifications:

Declaration of conformity for CE Marking

DIN 38412 – Neutral for the environment, lifespan higher than 10 years

DIN 4102 – Approval emergency access routes, fire resistance

DIN IN ISO 124 and B125 – Approval for car parks, access roads & storage areas

Compliance with Part M – Disabled access

